

Available online at www.sciencedirect.com



Journal of Nuclear Materials xxx (2004) xxx-xxx



www.elsevier.com/locate/jnucmat

Influence of an electric field on the microstructure evolution of ion-irradiated alumina

K. Yasuda *, K. Tanaka, M. Shimada, T. Yamamoto, S. Matsumura, C. Kinoshita

Department of Applied Quantum Physics and Nuclear Engineering, Kyushu University, Hakozaki 6-10-1, Fukuoka 812-8581, Japan

Abstract

Radiation-induced defects in α -alumina were investigated through transmission electron microscopy for specimens irradiated with 100 keV He⁺ ions at 760 K with an electric field of 100 kV/m. Ion-irradiation with an electric field induces characteristic defect clusters, such as bundles of long-shaped defect clusters, aluminum colloid and γ -alumina precipitates, and interstitial type-dislocation loops, though only dislocation loops were formed when the material is irradiated without an electric field. Electron microscopy analysis has revealed the lattice displacement vector of long-shaped defects, and the crystallographic relationship among α -alumina matrix, aluminum colloid and γ -alumina. © 2004 Published by Elsevier B.V.

1. Introduction

 α -Alumina, α -Al₂O₃, has potential applications for insulators and rf-windows in ITER, and will be subjected to simultaneous displacement damage and electronic excitation with an applied electric field from 10 to 10⁴ kV/m [1]. The most crucial problem for insulators under such radiation environments is radiation induced electrical degradation (RIED), which manifests itself as a permanent increase in electrical conductivity. This catastrophic degradation of insulating ability was originally found by Hodgson in polycrystalline α -Al₂O₃ [2]. They showed that an electric field of 180 kV/m stabilizes F⁻ centers induced by 1.8 MeV electron irradiation, and proposed that an electric field enhances oxygen vacancy aggregation and induces γ -Al₂O₃ formation [3,4].

It has been shown that point defects in ionic crystals carry an electric charge, and their migration and recombination processes are controlled by the Coulomb force of surrounding charges [5,6]. The nucleation-andgrowth processes of radiation-induced defects are, therefore, considered to be influenced by an applied electric field. The present authors have investigated the formation process of interstitial-type dislocation loops in ion-irradiated α -Al₂O₃ at 760 K under an electric field of 100 kV/m, and revealed that the electric field suppresses the nucleation of interstitial-type dislocation loops and enhances their growth [7,8]. A higher fraction of interstitials has been found to annihilate at surface sinks in thin-foil specimens due to a significant contribution of directional migration of interstitials driven by the electric field [8].

In the present paper, we report radiation-induced defects in α -Al₂O₃ formed under irradiation with 100 keV He⁺ ions in the presence of an applied electric field. Special attention is placed on analysis of anomalous defect clusters and precipitates of aluminum colloids and/or γ -Al₂O₃, which were characteristically formed in specimens irradiated with an electric field of 100 kV/m.

2. Experimental

Single crystals of α -Al₂O₃ (supplied by Bicron Ltd.), whose surfaces were oriented parallel to $(1 \ 1 \ \overline{2} \ 0)$ planes, were used in the present study. Electron-transparent specimens for TEM were prepared from disk-shaped

^{*}Corresponding author. Tel.: +81-92 642 3773; fax: +81-92 642 3771.

E-mail address: yasudak@nucl.kyushu-u.ac.jp (K. Yasuda).

specimens with 3 mm diameter and 100 μ m thickness by dimpling and ion-thinning with 4 keV Ar⁺ ions to make a small hole at the center. The thin-foil specimens were annealed in air at 1470 K for 2 h to eliminate defects induced during Ar⁺-ion thinning. Thin titanium layers (<0.1 μ m in thickness) were deposited in vacuum as electrodes on both surfaces of the specimen with a width of 0.5 mm. The distance between electrodes was 2 mm. The specimen was mounted in a sample holder specially developed by the present authors, which enabled irradiation in an ion-accelerator at high temperatures in the presence of an electric field. The details of the specimen holder, and the specimen and electrode configurations are described elsewhere [9].

The thin-foil specimens were irradiated with 100 keV He⁺ ions at 760 K with an applied DC voltage of 200 V up to a fluence of 1.3×10^{20} ions/m². The electric field is applied parallel to the specimen surface with a nominal value of E = 100 kV/m. The actual value of E in the observed region of the wedge-shaped thin-foil specimen is, however, expected to be complicated. A finite element simulation code of ANSYS [9] was applied to a model crystal possessing the same configuration as the specimen used in the present study. The values of E were dependent on the local position in the thin foil specimen, and the maximum value was observed at a position parallel to the electrodes was predicted to be about three times larger than the nominal value of E. Displacement damage was evaluated to be about 0.5 dpa by using SRIM-2000, with displacement energies of 20 eV for Al ions and 50 eV for O ions [10]. About \sim 98% incident ions were found to pass through the thin-foil specimens at thicknesses less than ~ 200 nm, where TEM observations were performed. Microstructures of these irradiated specimens were analyzed with the weak-beam dark-field (WBDF) technique and selected area electron diffraction (SAED) with a JEM-2000EX operated at 200 kV.

3. Results and discussion

Fig. 1 shows the microstructure of α -Al₂O₃ irradiated at 760 K with 100 keV He⁺ ions with an applied electric field of 100 kV/m, indicating the presence of dislocation loops as tiny dot-contrast features (indicated as A), and long-shaped defect clusters (indicated as B). It should be emphasized here that the defect clusters B were observed only in the specimen irradiated with an electric field. The defects B were observed heterogeneously in the specimen with developing bundles as shown in Fig. 1, and were seen to elongate in a [0001] direction, irrespective of the direction of the electric field. No systematic correlation was been found between the location where defect B is formed and the position of the electrode. In contrast, dislocation loops were formed homogeneously in both




Fig. 1. Typical example of WBDF images of a α -alumina irradiated with 100 keV He⁺ ions at 760 K with E = 100 kV/m. Tiny dot-contrast features of interstitial-type dislocation loops (indicated as A) and anomalous defect clusters (indicated as B) were seen. The upper right-hand photograph is the magnified microstructure of defect B. The electron-bean incident direction is $B = \langle 11\overline{2}0 \rangle$, and utilized diffraction condition is $g = 10\overline{12}$ (2g–6g).

specimens irradiated with and without the electric field. However, the electric field of 100 and 300 kV/m has significantly influenced the nucleation-and-growth process of dislocation loops, that is, an electric field suppresses the nucleation of dislocation loops but enhances their growth [7,8].

Fig. 2 illustrates the defect B taken with different reflections. The $g \cdot R_n$ analysis, where g and R_n are the diffraction vector and the lattice displacement vector respectively, reveals that the diffraction contrast of the defects B disappears with g = 0006 and $g = \overline{2}110$. This demonstrates that the defect B possesses a lattice displacement vector parallel to $\langle 01\overline{1}0 \rangle$, and suggests that the defect B is a planar defect, such as a dislocation loop or stacking fault.

A selected area electron diffraction (SAED) pattern from the regions where bundles of defects B are formed is shown in Fig. 3. Parts of Debye rings are seen in the SAED pattern in addition to diffraction spots of α -Al₂O₃ matrix. Table 1 summarize the interplanar spacing, d_{hkl} , evaluated for the Debye rings shown in Fig. 3 by using the relationship, $r_{hkl} \cdot d_{hkl} = \lambda \cdot L$, where λ is the wavelength of 200 keV electrons (0.0251 Å), L camera length (1200 mm) and r_{hkl} is the distance between the direct beam and individual Debye rings on a film. The evaluated values of d_{hkl} show good agreements with those of Al metal and part of γ -Al₂O₃. However, it is arduous to distinguish Al and γ -Al₂O₃ solely from the values of d_{hkl} shown in Fig. 3 since the lattice constant of Al metal (4.05 nm) is nearly one half of that of γ - Al_2O_3 (8.0 nm [11]), and both crystals belong to fee-base cubic structure.

To proceed further with the analysis, SAED patterns were taken from different incident electron-beam directions. Fig. 4(a) presents an SAED pattern for the $[1\bar{2}10]$

K. Yasuda et al. | Journal of Nuclear Materials xxx (2004) xxx-xxx

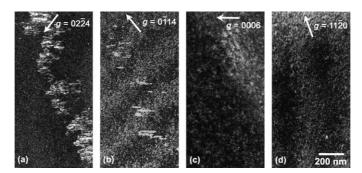


Fig. 2. Long-shaped defect clusters (defect B) taken with different refractions for $g = 10\overline{12}$ (a), $g = \overline{1014}$ (b), $g = 000\overline{6}$ (c) and $g = \overline{2110}$ (c). (c) and (d) are taken from the identical region with (a), and (b) is from the vicinity of (a).




Fig. 3. A SAED pattern of α -Al₂O₃ including bundles of longshaped defect clusters, irradiated with 100 keV He⁺ ions with an electric field of 100 kV/m. The incident electron beam direction is close to $[0\bar{4}41]$ of α -Al₂O₃ matrix.

Table 1 Experimentally measured interplanar spacing (d^{exp}) and calculated ones of Al metal (d^{Al}) and γ -alumina $(d^{\gamma-Al_2O_3})$

Experiment, d ^{exp} (Å)	Al metal, d^{Al}	γ -Al ₂ 0 ₃ , d^{γ -alumina	$ F_{hkl} ^2/F_{400} ^2$
		$d_{111} = 4.62$	0.055
		$d_{220} = 2.83$	0.118
		$d_{311} = 2.42$	0.323
(1) 2.30	$d_{111} = 2.34$	$d_{222} = 2.31$	0.023
(2) 2.01	$d_{200} = 2.02$	$d_{400} = 2.00$	1.000
(3) 1.40	$d_{220} = 1.43$	$d_{440} = 1.41$	1.439
(4) 1.20	$d_{311} = 1.22$	$d_{444} = 1.15$	0.415
(5) 1.01	$d_{400} = 1.01$	$d_{800} = 1.00$	0.431

Values of $|F_{hkl}|^2/|F_{400}|^2$ are also shown for γ -Al₂O₃, which were calculated with an assumption of random occupation of Al ions on octahedral and tetrahedral sites.

zone axis, which clearly shows extra spots in addition to those of α -Al₂O₃. These extra spots are indexed as belonging to the [$\overline{1}12$] zone axis of γ -Al₂O₃ and the [111] zone axis of Al metal (Fig. 4(c)). Apart of Debye rings are also seen at the lattice space of the 220 Al reflection. Similarly, the extra spots appearing on a SAED pattern for the [$2\overline{4}23$] zone axis were indexed as belonging to the [$\overline{1}10$] zone axis of γ -Al₂O₃ and the [010] zone axis of Al metal (Fig. 4(b) and (d)). Since the angles between the zone axes shown in Fig. 4(a) and (b), that is [$1\overline{2}10$] and [$2\overline{4}23$] for α -Al₂O₃, [$\overline{1}12$] and [$\overline{1}10$] for γ -Al₂O₃, and [111] and analysis [010] for Al metal, are almost identical, the results indicate that most of precipitates are not oriented randomly but possess a preferential crystallographic relationship as

α -Al₂O₃ $\langle 1\bar{2}10 \rangle / /$ Al $\langle 111 \rangle / / \gamma$ -Al₂O₃ $\langle \bar{1}12 \rangle$.

Furthermore, from the coincidence of diffraction spots in Fig. 4 (labeled with a large open circle in Fig. 4(c) and (d)), one can obtain a preferential relationship regarding habit planes among precipitates and matrix as

 α -Al₂O₃(10 $\overline{1}$ 0)//Al($\overline{1}$ 01)// γ -Al₂O₃(110).

Fig. 5 compares a WBDF image taken from a $(20\bar{2}4)$ reflection of the α -Al₂O₃ matrix (a) and a centered dark-field image taken from an extra diffraction spot (b) indexed as Al metal in identical regions. Defects exhibiting white dot contrast, whose size is about 10–20 nm, are seen uniformly in Fig. 4(b), whereas long-shaped defects and dislocation loops are seen in (a). The contrast shown in (b) is entirely different from that of dislocation loops [7,12,13]. Precipitates of γ -Al₂O₃ are also confirmed through WBDF images.

As described above, our TEM analyses clearly show that an electric field induces characteristic defects in α -Al₂O₃, such as long-shaped defects, and the precipitation of Al colloids and γ -Al₂O₃, in addition to dislocation loops. This implies that charge neutrality is not retained in specimens irradiated in the presence of an electric field, and the nucleation of nonstoichiometric

ARTICLE IN PRESS

K. Yasuda et al. | Journal of Nuclear Materials xxx (2004) xxx-xxx

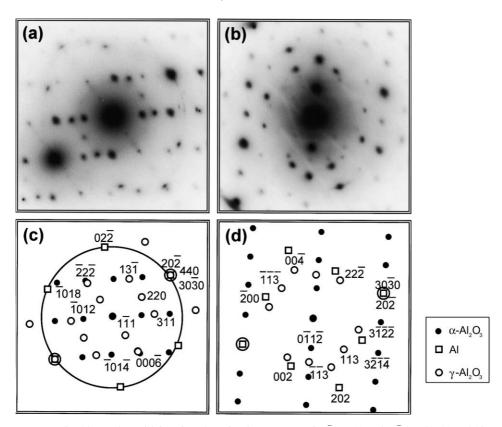


Fig. 4. SAED patterns of α -Al₂O₃ taken with imaging plates for the zone axes of $[1\bar{2}10]$ (a) and $[2\bar{4}23]$ (b). (c) and (d) are the indexed patters as belonging Al [111] zone axis and γ -Al₂O₃ [$\bar{1}12$] zone axis (c) and Al [010] zone axis and γ -Al₂O₃ [$\bar{1}10$] zone axis. Extra spots superimposed with three phases are labelled with large open circles in (c) and (d).

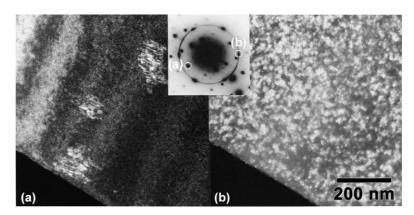


Fig. 5. A comparison of microstructure showing bundles of long-shape defect clusters and Al colloids in the identical region taken from different diffraction spots of (a) and (b), respectively. The electron-bean incident direction is $B = \langle 1 1 \overline{2} 0 \rangle$.

defect clusters is stabilized. Pells and Hodgson [4] observed very large precipitates of γ -Al₂O₃ (~0.1–2 µm in size) in α -Al₂O₃, irradiated with 1.8 MeV electrons at 730 K with an electric field of 130 kV/m, and discussed that an electric field stabilizes may F⁺ centers [3] to promote aggregation of F_2 centers (or oxygen vacancy clusters), leading to a phase transformation to an Al-rich phase of γ -Al₂O₃.

Kinoshita et al. [14] have shown that dislocation loops change their Burgers vector as $\frac{1}{3}[0001] \rightarrow$ $\frac{1}{3}\langle 10\overline{1}0\rangle \rightarrow \frac{1}{3}\langle 10\overline{1}1\rangle$ to be converted from faulted loops to unfaulted ones, with increasing size. Therefore, a speculation for the formation of long-shaped defects is that faulted loops with $b = \frac{1}{3} \langle 10\overline{1}0 \rangle$ are stabilized to grow in a particular (0001) direction, due to the directed migration of interstitials under the an influence of the electric field. This may change the defect kinetics to promote precipitation of Al colloids and γ -Al₂O₃, although further work is necessary to provide an understandings the physical mechanisms. It is also interesting to note that the size of Al collides (10-20 nm) is larger than that of γ -Al₂O₃. This is possibly explained by the phase transformation from γ -Al₂O₃ to Al colloids with increasing size or irradiation fluence. This may explain why only the γ -Al₂O₃ phase was observed in α -Al₂O₃ [5] reported by Pells et al., which were subjected to a low level of displacement damage ($\sim 10^{-5}$ dpa) with 1.8 MeV electrons under an electric field of 130 kV/m.

4. Conclusions

We have investigated through transmission electron microscopy the nucleation-and-growth process of defect clusters in α -Al₂O₃ irradiated with 100 keV He⁺ ions with an applied electric field of 100 kV/m. The main conclusions are drawn as follows.

- Irradiation with an electric field induces long-shaped defect clusters which are elongated in the [0001] direction having a lattice displacement vector of (1 1 00), precipitation of Al colloids and γ-Al₂O₃, and interstitial-type dislocation loops.
- (2) Al colloids and γ-Al₂O₃ precipitates were formed heterogeneously in specimens, and are observed solely at regions where long-shaped defects were observed.
- (3) SAED pattern analysis revealed the following crystallographic relationship among the three phases: α-Al₂O₃(1210)//Al(111)//γ-Al₂O₃(112), α-Al₂O₃-(1010)//Al(101)//γ-Al₂O₃(110). A part of precipitates were formed with a random orientation constituting parts of Debye rings in SAED patterns.

(4) An electric field is found to change not only the density and size of defect clusters but also the morphology and nature of defect clusters, which are considered to influence the physical properties of insulating ceramics, such as RIED phenomenon.

Acknowledgements

A part of TEM experiments were carried out at the HVEM laboratory, Kyushu University. We are grateful to M. Kutsuwada of Kyushu University for his assistance to ion irradiations. This work was supported in part by TEPCO research foundation and Japan Nuclear Cycle Development Institute (JNC).

References

- T. Shikama, K. Yasuda, S. Yamamoto, C. Kinoshita, S.J. Zinkle, E.R. Hodgson, J. Nucl. Mater. 271&272 (1999) 560.
- [2] E.R. Hodgson, Cryst. Latt. Def. Amorph. Mater. 18 (1989) 169.
- [3] E.R. Hodgson, A. Moroño, J. Nucl. Mater. 283 (2000) 880.
- [4] G.P. Pells, E.R. Hodgson, J. Nucl. Mater. 226 (1995) 291.
- [5] C. Kinoshita, Y. Isobe, H. Abe, Y. Denda, T. Sonoda, J. Nucl. Mater. 206 (1993) 341.
- [6] E.A. Kotomin, A.I. Popov, Nucl. Instrum. and Meth. B 141 (1998) 1.
- [7] K. Yasuda, T. Higuchi, K. Shiiyama, C. Kinoshita, K. Tanaka, M. Kutsuwada, Phil. Mag. Lett. 83 (2003) 21.
- [8] T. Higuchi, K. Yasuda, K. Shiiyama, M. Kutsuwada, C. Kinoshita, Nucl. Instrum. and Meth. B 206 (2003) 103.
- [9] http://www.ansys.com.
- [10] S.J. Zinkle, C. Kinoshita, J. Nucl. Mater. 251 (1997) 200.
- [11] H. Konig, Naturwissenschafen 35 (1948) 92.
- [12] K. Yasuda, C. Kinoshita, Nucl. Instrum. and Meth. B 191 (2002) 559.
- [13] K. Yasuda, C. Kinoshita, M. Ohmura, H. Abe, Nucl Instrum. and Meth. B. 166&167 (2000) 107.
- [14] C. Kinoshita, S. Matsumura, K. Yasuda, T. Soeda, M. Noujima, Mat. Res. Soc. Symp. Proc. 540 (1999) 287.